

ATTENTION:

OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DEVICES

Removal/Installation of Motherboard - Blue MAXX/MAXX Classic Countertop

Motherboard Removal

1. Turn off and unplug the game.
 2. Unlock and open the lid.
 3. Use the *Motherboard Diagrams* section to determine the board type in your game, then disconnect all connections to the board.
 4. Using a 1/4" nut driver, remove the 2 nuts securing the motherboard assembly to the game (see Figure 1) and remove the board. Insert the board into an anti-static bag for storage.
- NOTE: Be sure to read the Motherboard Handling Precautions before handling the board.

Motherboard Installation

1. Place the new motherboard in the game and fasten it with the 2 nuts.
2. Reconnect all connections to the board.
3. Close and lock the lid.
4. Plug in and turn on the game.

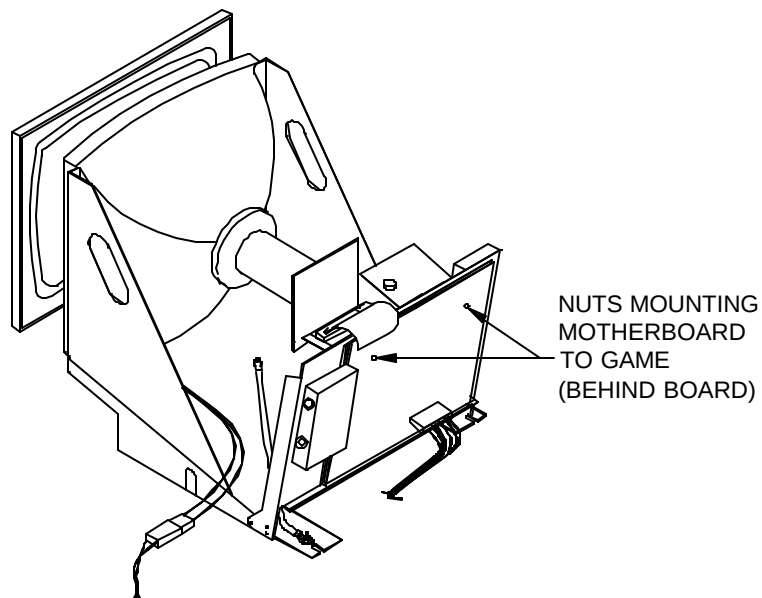


FIGURE 1 - BLUE MAXX/MAXX CLASSIC - MOTHERBOARD REMOVAL

Motherboard Diagrams

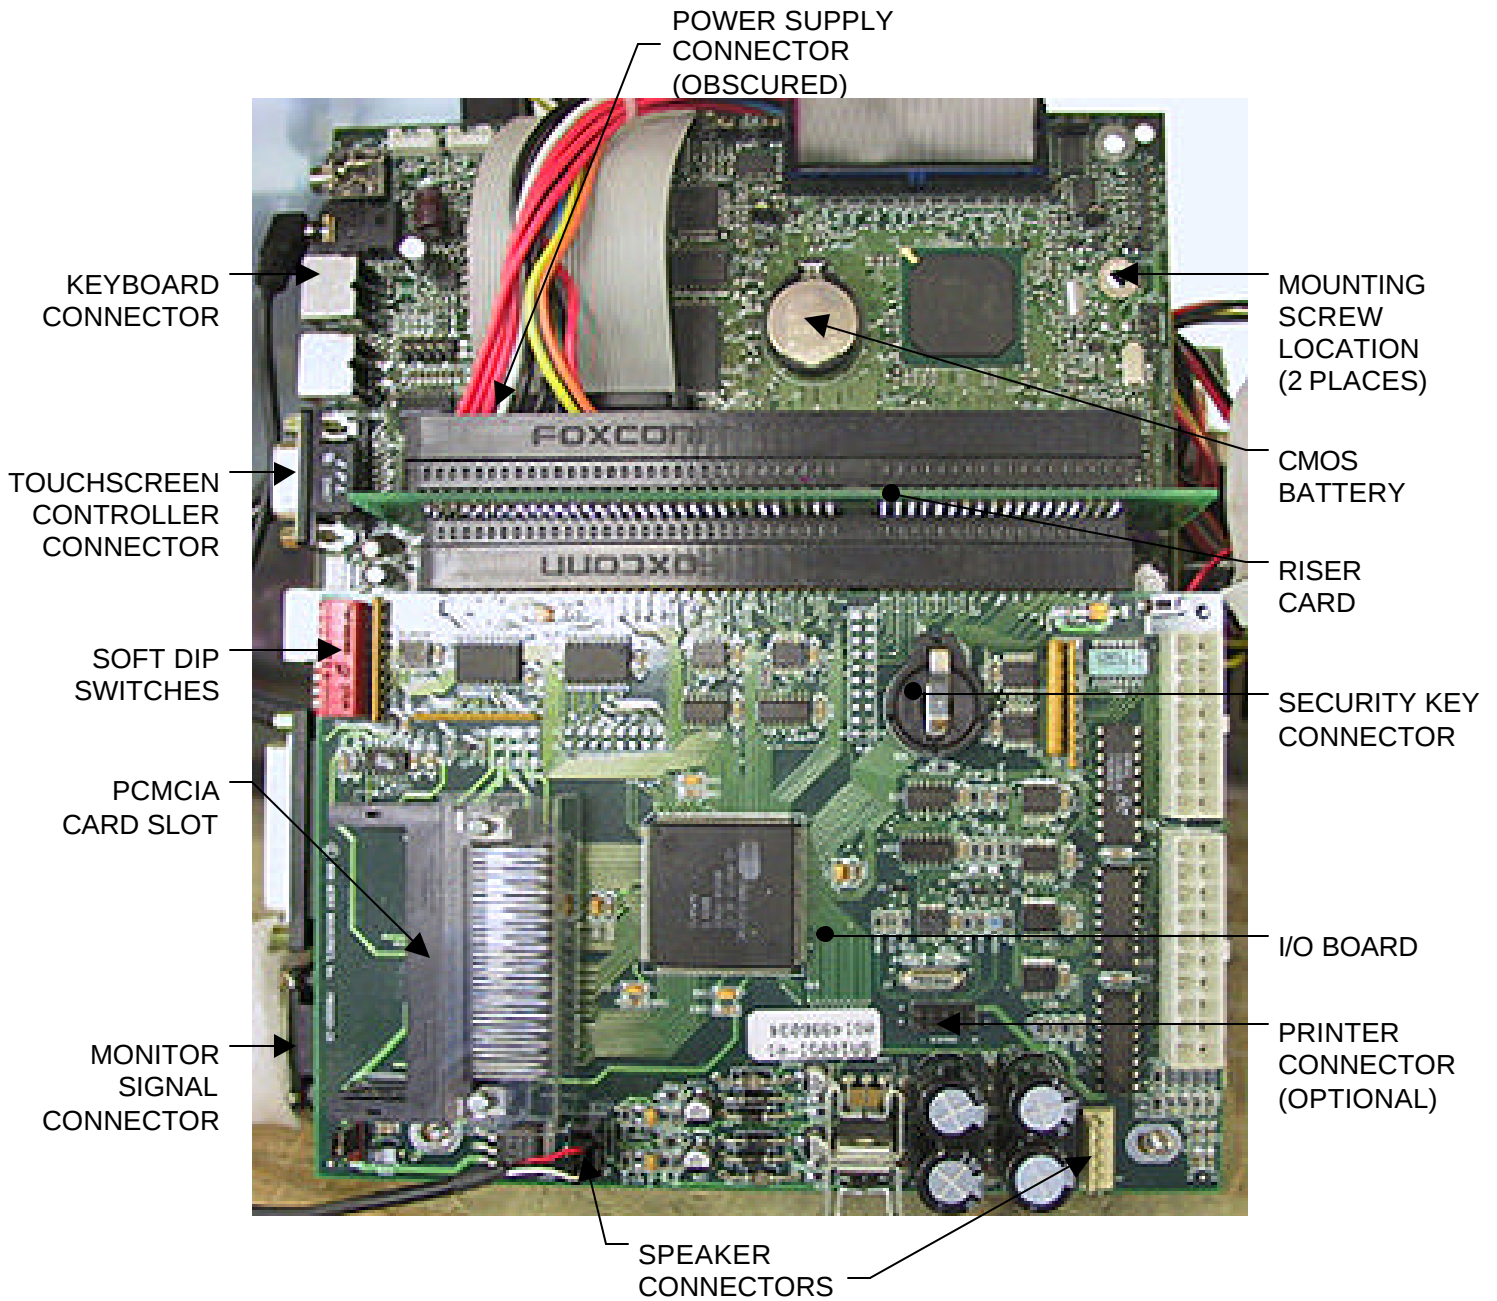


FIGURE 2 - ITOX/MITSUBISHI MOTHERBOARD

Motherboard Diagrams

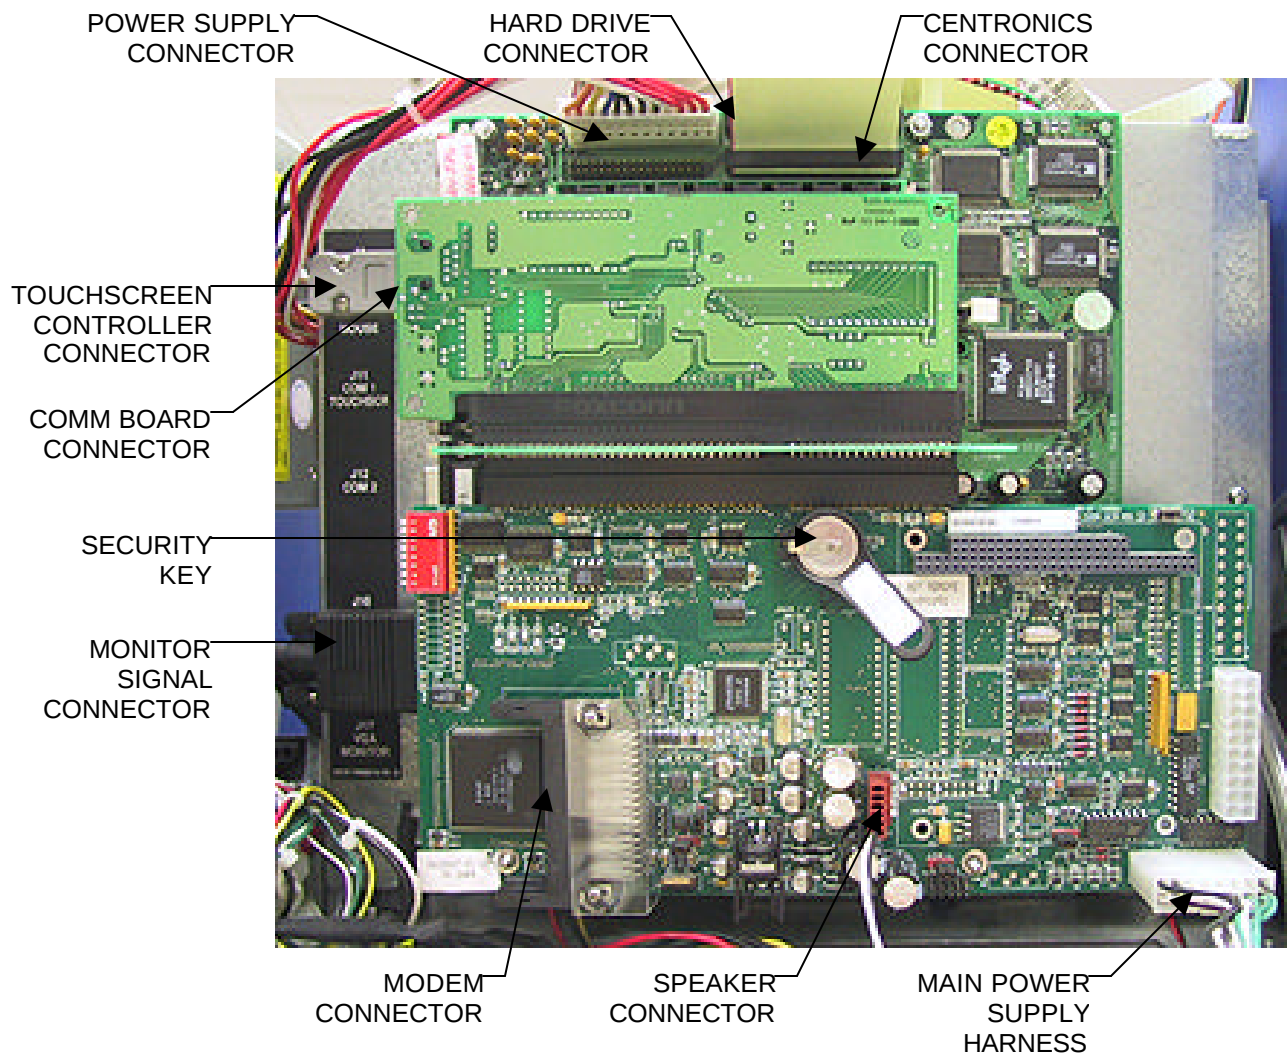


FIGURE 3 - TELCO MOTHERBOARD

Motherboard Diagrams

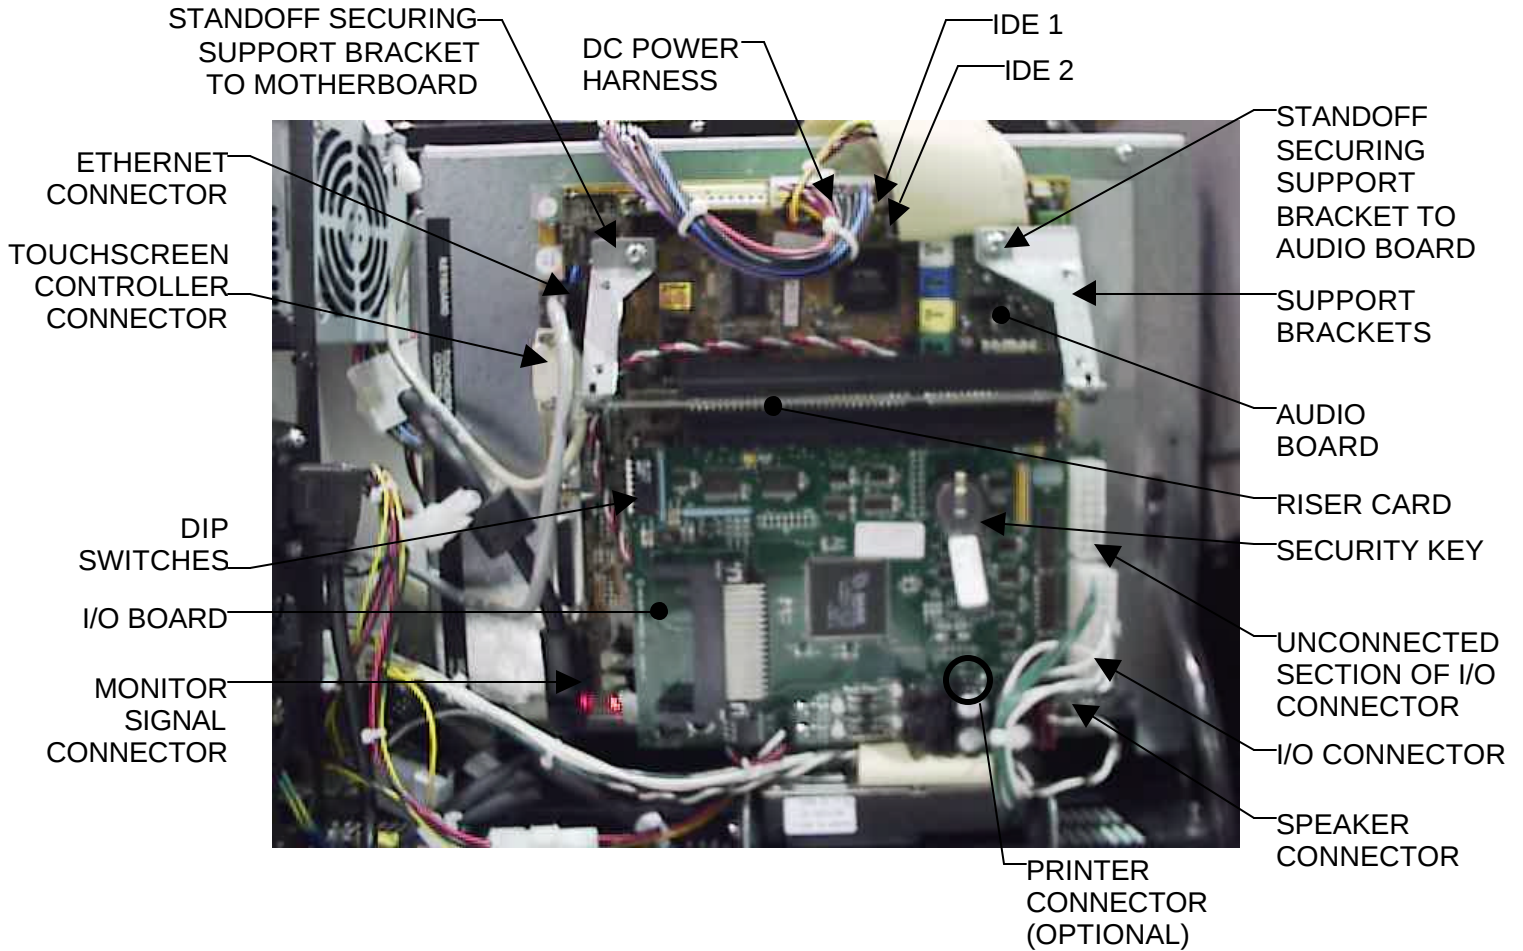


FIGURE 4 - UNICORN MOTHERBOARD